


REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED

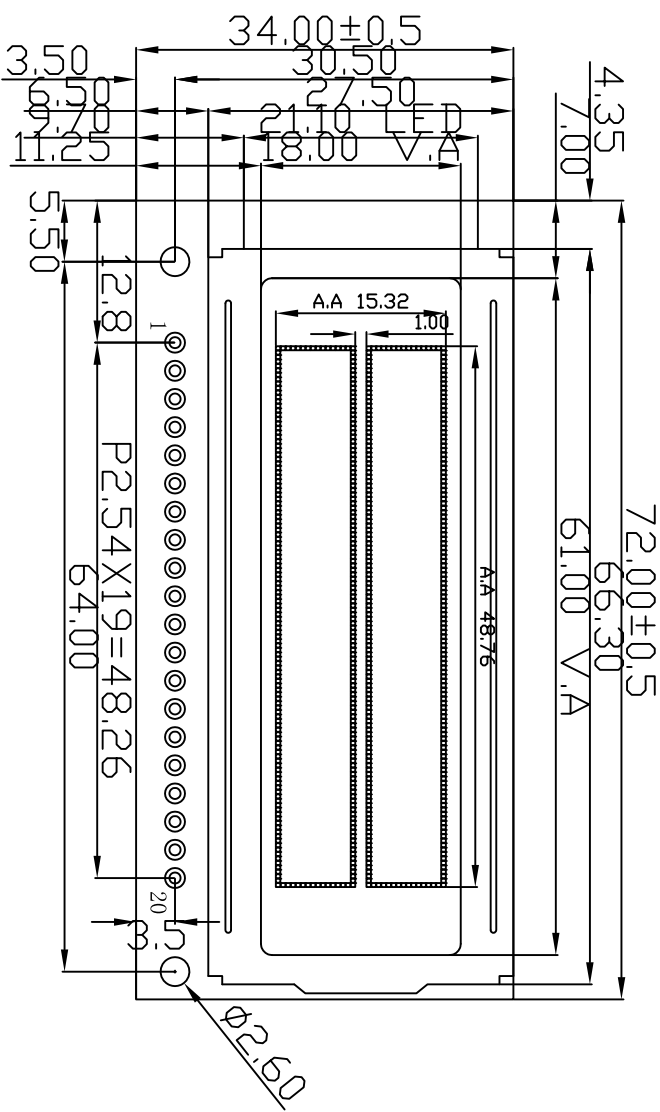

PIN NO.	1	2	3	4	5	6	7	8	9	10
SYMBOL	VSS	VDD	VOUT	RS (CS) _{RW} (STD) _{CLK}	RS (STD) _{CLK}	D0	D1	D2	D3	D3
PIN NO.	11	12	13	14	15	16	17	18	19	20
SYMBOL	D4	D5	D6	D7	PSB	RST	LED-	LED+	NC	NC

NOTE:

1. DISPLAY MODE: STN/Y-G/POSITIVE/TRANSFLECTIVE
2. VIEWING DIRECTION: 6:00
3. OPERATION TEMP: -20° C - +70° C
4. STORAGE TEMP: -30° C - +80° C
5. DRIVE METHOD: 1/32DUTY, 1/6BIAS
6. CONTROLLER: ST7920-0B (简体中文字库)
7. VDD=5.0V, ILED=30mA (@VLED=5.0V), COLOR: Y-G

